


MODEL YF 2500 2500# ANSI CARBON STEEL RAISED FACE / RTJ FLANGED "Y" STRAINER

DRAWING A 81

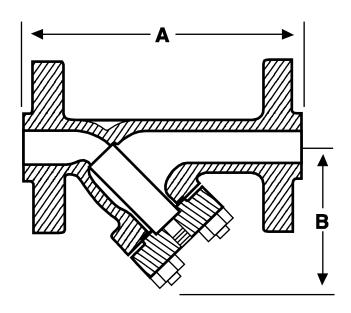

DESCRIPTION	MATERIAL
BODY	ASTM A216 GR. WCB
COVER	ASTM A216 GR. WCB
STUD	ASTM A193 GR. B7
NUT	ASTM A194 GR. 2H
GASKET	SPIRAL WOUND SS
SCREEN	304 SS 1/8 PERF

TEMPER	ATURE	WORKING PRESSURE			
С	F	kPa	P.S.I.		
-29 to 38	-20 to 100	42540	6170		

FLANGES ARE IN ACCORDANCE WITH ANSI B16.5 ALL STRAINERS ARE INDIVIDUALLY HYDROSTATICALLY TESTED TO ANSI B16.5

		DIMENSIONS						SCREEN		NET	
SIZE		A B		В	DRAIN		REMOVAL		WEIGHT		
mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	Kg.	Lbs.
50	2	410	16 1/8	254	10	25	1	330	13	72	160
80	3	572	22 1/2	356	14	25	1	407	16	175	385

FEATURES

BODY HAS A MACHINED SEAT TO HOLD SCREEN SECURELY.

COVER HAS A MACHINED SCREEN HOLDER TO ALIGN SCREEN DURING INSTALLATION AND TO RETAIN SEDIMENT WHEN COVER IS REMOVED.

BODY IS MACHINED TO HOLD COVER GASKET IN A BLOW-OUT PROOF DESIGN.

FLANGES ARE BACK FACED OR SPOT FACED.