


<b>ALTA</b>	<b>MODEL YS 3000SS CLASS 3000 316SS SCREWED / SOCKET WELD "Y" STRAINER</b>	<b>DRAWING A 103</b>
-------------	--	----------------------

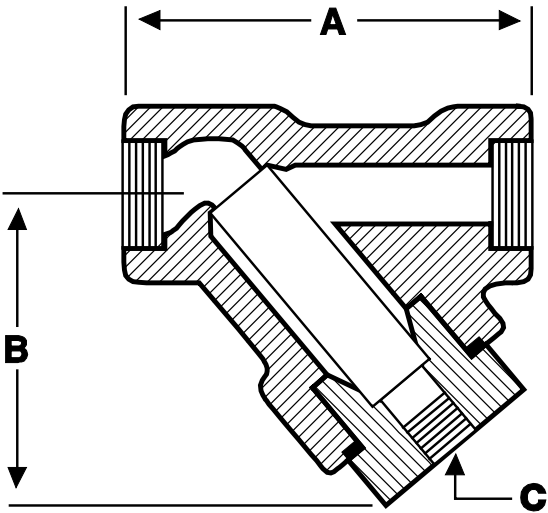

DESCRIPTION	MATERIAL
BODY	ASTM A182 GR F316
CAP	ASTM A182 GR F316
GASKET	SPIRAL WOUND SS
SCREEN	304 SS 1/32 PERF

TEMPERATURE		WORKING PRESSURE	
C	F	kPa	P.S.I.
-29 to 38	-20 to 100	20670	3000

**ALL STRAINERS ARE INDIVIDUALLY HYDROSTATICALLY TESTED TO ANSI B16.5**

SIZE		DIMENSIONS				NET WEIGHT			
		A		B				C	
mm	in.	mm	in.	mm	in.	mm	in.	Kg.	Lbs
15	1/2	79	3 1/8	83	3 1/4	10	3/8	.9	2
20	3/4	95	3 3/4	85	3 3/8	10	3/8	1.4	3
25	1	117	4 5/8	89	3 1/2	15	1/2	1.8	4

### **FEATURES**

**BODY HAS A MACHINED SEAT TO HOLD SCREEN SECURELY.**

**CAP HAS A MACHINED SCREEN HOLDER TO ALIGN SCREEN DURING INSTALLATION AND TO RETAIN SEDIMENT WHEN CAP IS REMOVED.**

**BODY IS MACHINED TO HOLD CAP GASKET IN A BLOW-OUT PROOF DESIGN.**