


MODEL YF 1500 SS 1500# ANSI 316SS RAISED FACE / RTJ FLANGED "Y" STRAINER

DRAWING A 74

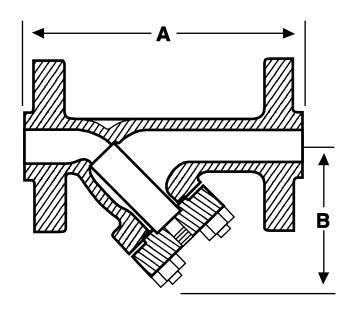

DESCRIPTION	MATERIAL
BODY	ASTM A351 GR. CF8M
COVER	ASTM A351 GR. CF8M
STUD	ASTM A193 GR. B8
NUT	ASTM A194 GR. B8
GASKET	SPIRAL WOUND SS
SCREEN	304 SS 1/8 PERF

TEMPER	ATURE	WORKING PRESSURE			
С	F	kPa	P.S.I.		
-29 to 38	-20 to 100	24822	3600		
95	200	21340	3095		
150	300	19272	2795		
200	400	17720	2560		

FLANGES ARE IN ACCORDANCE WITH ANSI B16.5 ALL STRAINERS ARE INDIVIDUALLY HYDROSTATICALLY TESTED TO ANSI B16.5

		DIMENSIONS						SCREEN		NET	
SIZE		A		В		DRAIN		REMOVAL		WEIGHT	
mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	Kg.	Lbs.
50	2	348	13 3/4	220	8 5/8	25	1	241	9 1/2	43	96
80	3	479	18 7/8	304	12	25	1	343	13 1/2	93	205
100	4	590	23 1/4	330	13	40	1 1/2	381	15	134	295

LARGER SIZES AVAILABLE. PLEASE CONTACT US FOR DIMENSIONS.

FEATURES

BODY HAS A MACHINED SEAT TO HOLD SCREEN SECURELY.

COVER HAS A MACHINED SCREEN HOLDER TO ALIGN SCREEN DURING INSTALLATION AND TO RETAIN SEDIMENT WHEN COVER IS REMOVED.

BODY IS MACHINED TO HOLD COVER GASKET IN A BLOW-OUT PROOF DESIGN.

FLANGES ARE BACK FACED OR SPOT FACED.